

CHEMISTRY THAT MATTERS™



BIO-CIRCULAR ULTEM™ RESINS ISCC+ CERTIFIED SUSTAINABILITY

SABIC'S SPECIALTIES BUSINESS



A new portfolio of bio-circular ULTEM™ resins that deliver a lower carbon footprint while offering exactly the same high performance and processability as incumbent ULTEM materials.

These breakthrough polyetherimide (PEI) materials are the first certified renewable high-temperature, amorphous resins available in the industry for potential use in challenging applications in consumer electronics, aerospace, automotive and other industries.



SABIC SUSTAINABILITY


CIRCULAR ECONOMY inspires SABIC to adapt our processes to the use of renewable and recycled feedstock, and to create durable, recyclable product design solutions for our customers.



BIO-CIRCULAR FEEDSTOCK


- Replacing fossil-based feedstock
- Second generation renewable feedstock
- Animal and palm oil free
- Derived from waste or residue, such as crude tall oil
- ISCC+ certified value chains

SABIC ISCC+ CERTIFIED ULTEM™ RESIN SOLUTIONS

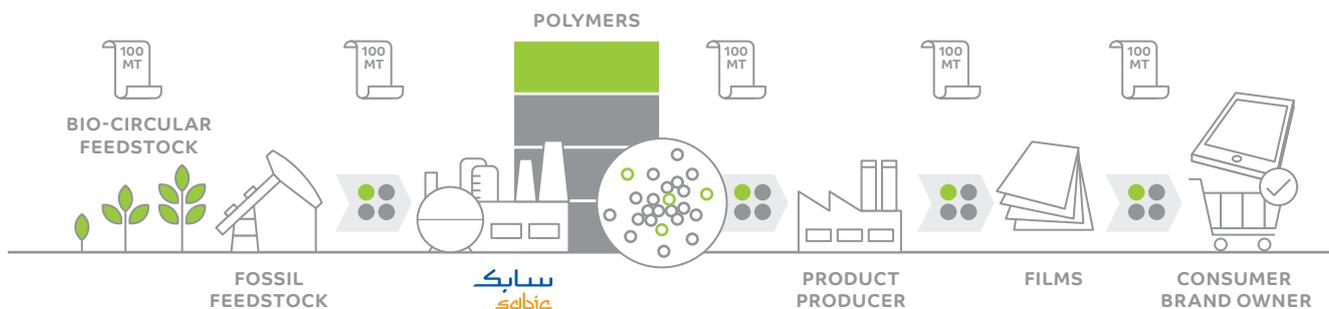


For every **100kg** of this ULTEM™ resin, **25.5 kg** of oil-based materials have been replaced by bio-circular materials, based on mass balance approach.

LIFE CYCLE ASSESSMENT (LCA)

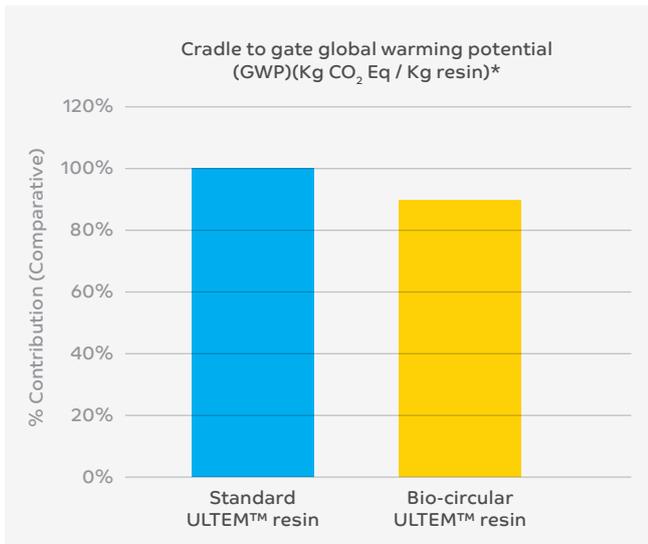

COMPARED WITH STANDARD ULTEM™ RESIN, UP TO:

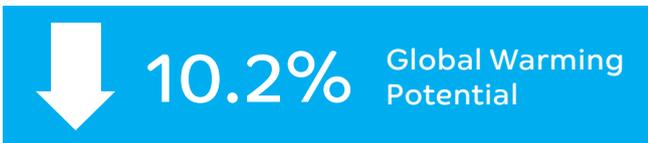

POTENTIAL MARKETS AND APPLICATIONS:



Consumer Electronics

- Wearables
- Mobile devices



Automotive

- Connectors
- Sensors
- Valves



Healthcare

- Surgical devices
- Sterilization trays



Aerospace Interiors

- Personal service units
- Panels and trim



Electrical/Electronics

- 5G networking infrastructure
- Connectors

* Cradle to Gate internal life cycle assessment (LCA) conducted by following the general principles of LCA according to the ISO 14040/14044¹ guidelines; pending external critical review.

¹ ISO 14040:2006 Environmental management. Life cycle assessment, Principles and Framework: <https://www.iso.org/standard/37456.html>

MATERIAL PERFORMANCE

With the same reliable mechanical properties as their fossil-based counterparts, bio-circular ULTEM resins can be considered as an alternative material to traditional ULTEM resins or sulfone polymers such as PSU, PESU and PPSU.

- Long-term high heat capability
- Dimensional stability / tight tolerances
- Strength and modulus at high temperatures
- Inherent flame resistance
- Low smoke evolution and toxicity
- Hydrolytic and chemical stability





CONTACT INFORMATION

SABIC SPECIALTIES BUSINESS

AMERICAS

E: Specialties.Americas@sabic-hpp.com
T: +1 800 845 0600

ASIA PACIFIC

E: Specialties.Asia@sabic-hpp.com
T: +86 400 833 1033

EUROPE

E: Specialties.EMEA@sabic-hpp.com
T: +36 1 288 3040



SABIC MATERIAL FINDER
Find the right Specialties material
for your application ▶



ULTEM, SILTEM, EXTEM
RESINS

DISCLAIMER: ANY SALE BY SABIC, ITS SUBSIDIARIES AND AFFILIATES (EACH A "SELLER"), IS MADE EXCLUSIVELY UNDER SELLER'S STANDARD CONDITIONS OF SALE (AVAILABLE UPON REQUEST) UNLESS AGREED OTHERWISE IN WRITING AND SIGNED ON BEHALF OF THE SELLER. WHILE THE INFORMATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY AND NONINFRINGEMENT OF INTELLECTUAL PROPERTY, NOR ASSUMES ANY LIABILITY, DIRECT OR INDIRECT, WITH RESPECT TO THE PERFORMANCE, SUITABILITY OR FITNESS FOR INTENDED USE OR PURPOSE OF THESE PRODUCTS IN ANY APPLICATION. Each customer must determine the suitability of seller materials for the customer's particular use through appropriate testing and analysis. No statement by seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right. SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates, unless otherwise noted.

© 2024 Saudi Basic Industries Corporation (SABIC). All Rights Reserved. Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.